



Enrich

Shenzhen Enrich Lighting Co., Ltd.

Add: Block B, Chinto Technology Building, Minzhi Blvd,
Longhua District, Shenzhen, 518131, China.

Tel: +86-755-83259929 Fax: +86-755-23570706

Wechat: Qian921086302

Website: www.szenrich.com

Email: sales15@szenrich.com



Phone/WhatsApp: 0086-15361537851



LED Linear Light

Enrich

Installation:

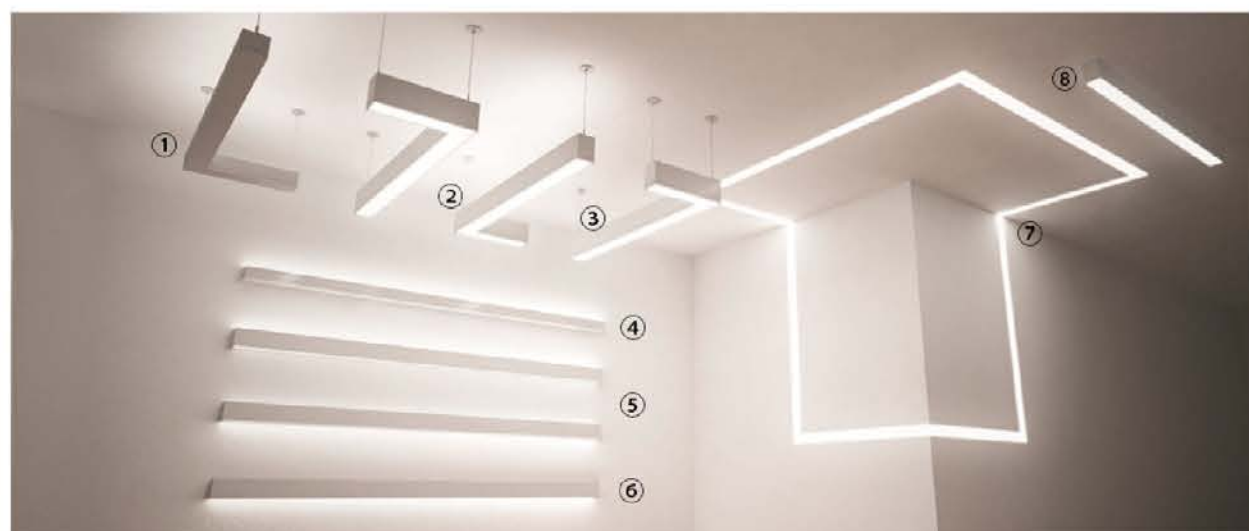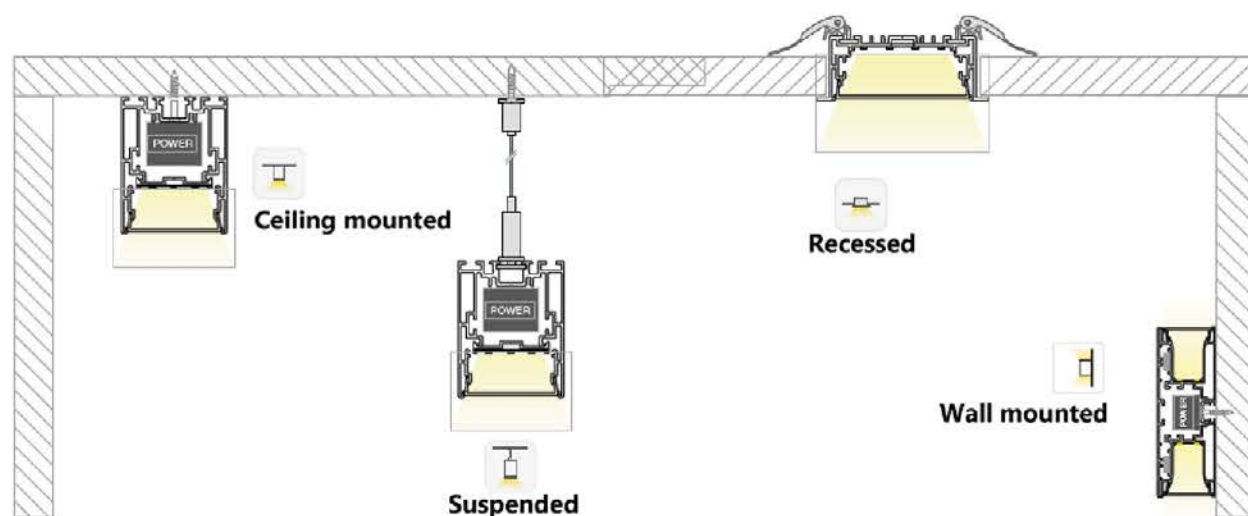

- | | |
|--------------------------------|-----------------------------------|
| ① Suspended up lighting | ⑤ Wall mounted up & down lighting |
| ② Suspended up & down lighting | ⑥ Wall mounted down lighting |
| ③ Suspended down lighting | ⑦ Ceiling/Wall recessed |
| ④ Wall mounted up lighting | ⑧ Ceiling surface mounted |



Shenzhen Enrich Lighting Co., Ltd. is the subsidiary of Enrich Group. In the past 12 years, Enrich Lighting has been manufacturing energy saving and modern designed LED products that tremendously improve people's lives.

From 2015, Enrich has expanded more product development into commercial lighting area, and started producing Aluminum Profile LED Linear Light, included variety of types, models and functions.

From 2017, Enrich improved straight linear to be curved shape, and designed the most attractive Curved Aluminum LED Ring Light, S Shape Light, Oval Shape Light, and other customized designs.

Now Enrich Lighting is recognized as quality brand of many kinds of interior lights. Up to now, we have brought LED illumination to over 100 countries and regions in the world. How a great thing it is at the moment and in the future.

Our mission is to offer a complete solution based on customer demands. From Product design, Developing, Sourcing Material, Manufacturing Process and Shipping, to realize the vision of global illuminating through energy efficient and cost effective LED lights.

What Is LED Linear Light and Ring Light?

With features modern simple, comfortable performance, led linear light and ring light are widely applied to Office Building/Municipal Hall/Bank/Hospital/Shopping Mall/Store/School/Metro Station/Gym/Game Center/Business Complex Lighting areas. Linear light and ring light always provide more visual sense than other traditional lights. To show their lighting philosophy completely, we are constantly working on improving products, such as technology of seamless connection, flicker-free, low glare, and so on.

Product Feature

- ◆ Variety of types for your option, included different mounting ways
- ◆ Customized length, customized color
- ◆ High quality famous brand drivers with input voltage AC100-240V
- ◆ 6063 Aluminum Alloy fixture with good heat dissipation
- ◆ High quality PC/PMMA/PS diffuser
- ◆ Linkable, continuous connection without dark space
- ◆ Long Lifespan: 50,000 hours, 3 years and 5 years warranty
- ◆ Certification: CE RoHS SAA Certificated.

目录

CONTENT

- EN-3567 01
- EN-5070 02
- EN-5075 03
- EN-10064 04
- Suspended/Ceiling mounted Connecting 05
- EN-5575 06
- EN-7575A 07
- EN-7575B & EN-7575C 08
- EN-5065 09
- EN-2285 10
- EN-3570 11
- EN-75105 12
- Recessed Connecting 13
- EN-7035 14
- EN-9035 15
- EN-8030 16
- Suspended installation introduction 17
- Recessed installation introduction 18
- Wall mounted installation introduction 19
- LED Ring Light Application 20
- LED Ring Light 21
- LED S Shape Light 22
- Curved Shape Light Application 23
- LED Oval Shape Light 24
- More Customized Design 25
- Mounting Types 26

LED Linear light


PC extrusion diffuser





PMMA microprism(diamond)
diffuser – Anti glare



Combination
PMMA microprism(diamond) diffuser
+
Optical reflector cup
UGR<19

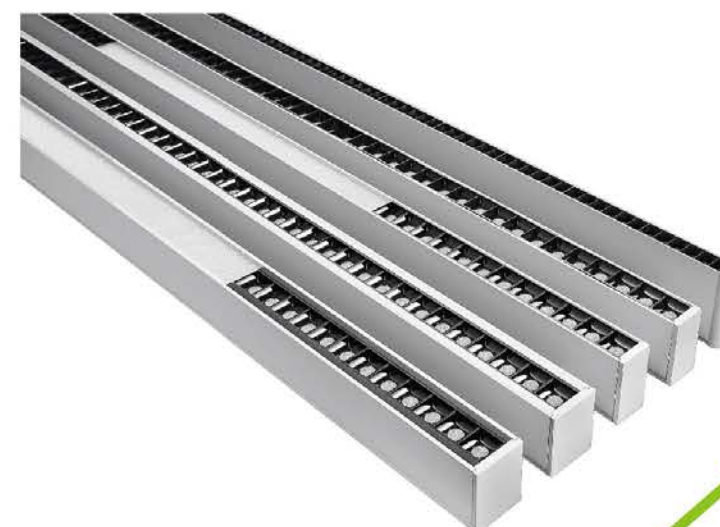


■ EN-3567 Suspended

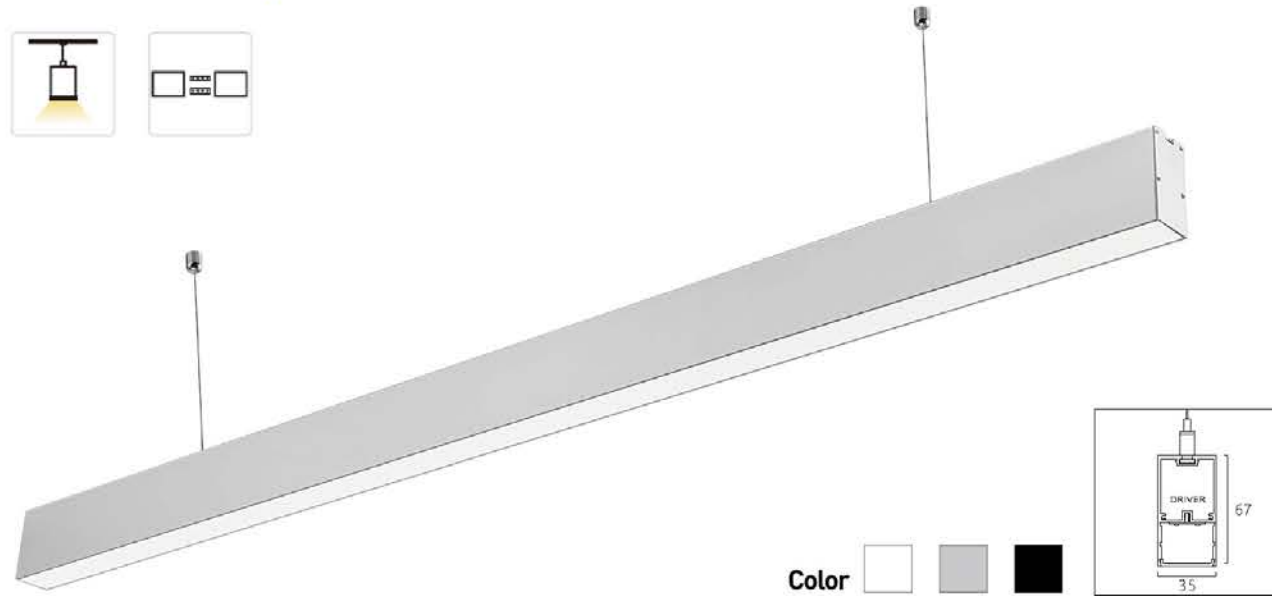

Color   

Details & Structure:

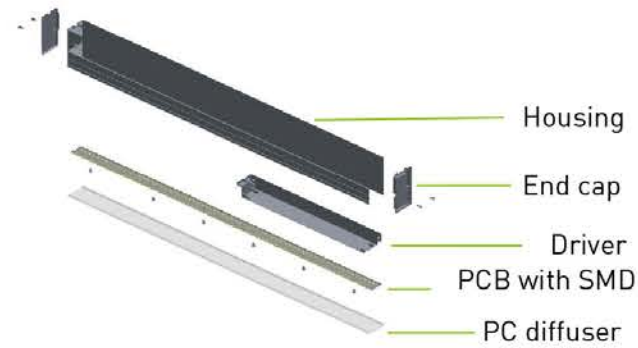


Specifications:

Model	Size	Power	Voltage	LED Qty	Luminous Efficiency	Color Temperature	Shell Color
EN-3567-LS20W06	L600*W35*H67mm	20W	AC100-277V AC200-240V	SMD2835 - 120pcs	90lm/W	3000K	White Silver Black
EN-3567-LS40W12	L1196*W35*H67mm	40W		SMD2835 - 240pcs		4000K	
EN-3567-LS60W18	L1790*W35*H67mm	60W		SMD2835 - 360pcs		6000K	
EN-3567-LS80W24	L2386*W35*H67mm	80W		SMD2835 - 480pcs			




■ EN-5070 Suspended

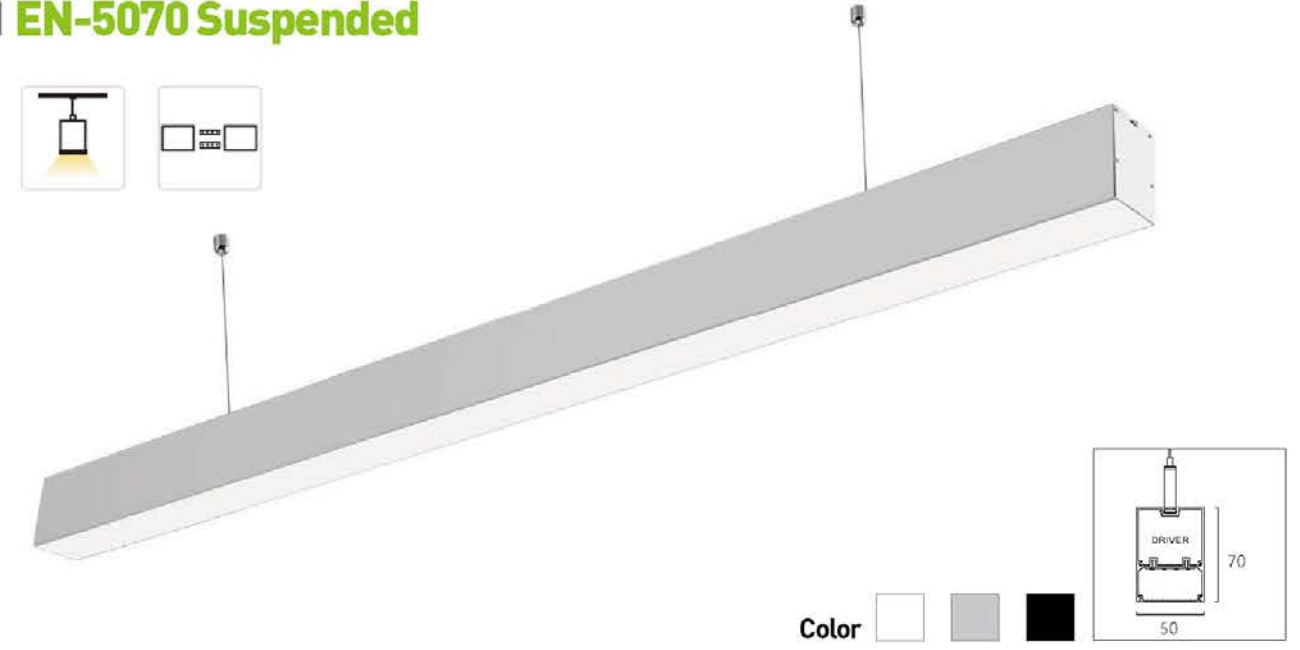

Color   

Details & Structure:

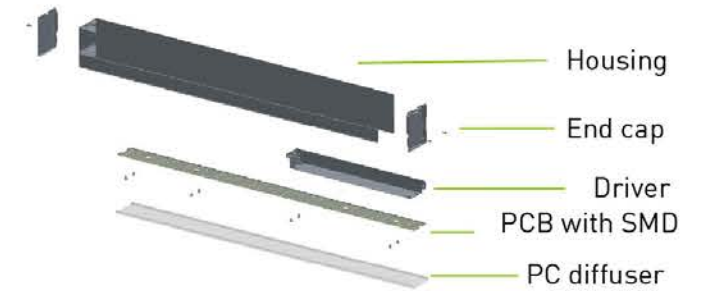


Specifications:


Model	Size	Power	Voltage	LED Qty	Luminous Efficiency	Color Temperature	Shell Color
EN-5070-LS20W06	L601*W50*H70mm	20W	AC100-277V AC200-240V	SMD2835 - 144pcs	100lm/W	3000K	White Silver Black
EN-5070-LS40W12	L1196*W50*H70mm	40W		SMD2835 - 288pcs		4000K	
EN-5070-LS60W18	L1791*W50*H70mm	60W		SMD2835 - 432pcs		6000K	
EN-5070-LS80W24	L2386*W50*H70mm	80W		SMD2835 - 576pcs			




■ EN-5075 U-shaped Suspended



Color



Details & Structure:

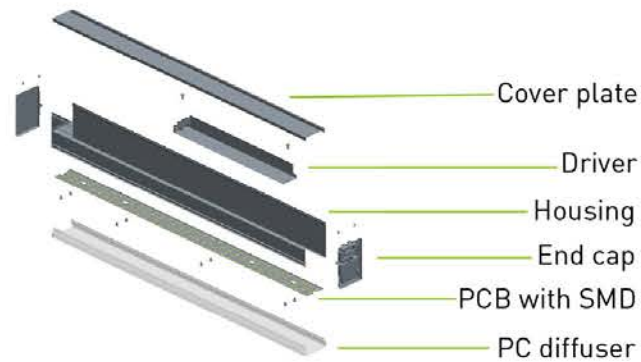

Specifications:


Model	Size	Power	Voltage	LED Qty	Luminous Efficiency	Color Temperature	Shell Color
EN-5075-LS20W06	L605*W50*H75mm	20W	AC100-277V AC200-240V	SMD2835 - 144pcs	90lm/W	3000K	White Silver Black
EN-5075-LS40W12	L1200*W50*H75mm	40W		SMD2835 - 288pcs		4000K	
EN-5075-LS60W18	L1795*W50*H75mm	60W		SMD2835 - 432pcs		6000K	
EN-5075-LS80W24	L2390*W50*H75mm	80W		SMD2835 - 576pcs			




■ EN-10064 Suspended



Color




Details & Structure:


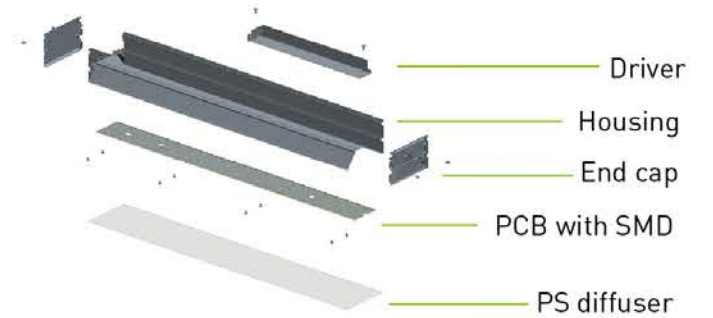


Specifications:



Model	Size	Power	Voltage	LED Qty	Luminous Efficiency	Color Temperature	Shell Color
EN-10064-LS20W06	L605*W100*H64mm	20W	AC100-277V AC200-240V	SMD2835 - 144pcs	110lm/W	3000K	White Silver Black
EN-10064-LS40W12	L1200*W100*H64mm	40W		SMD2835 - 288pcs		4000K	
EN-10064-LS60W18	L1795*W100*H64mm	60W		SMD2835 - 432pcs		6000K	
EN-10064-LS80W24	L2390*W100*H64mm	80W		SMD2835 - 576pcs			

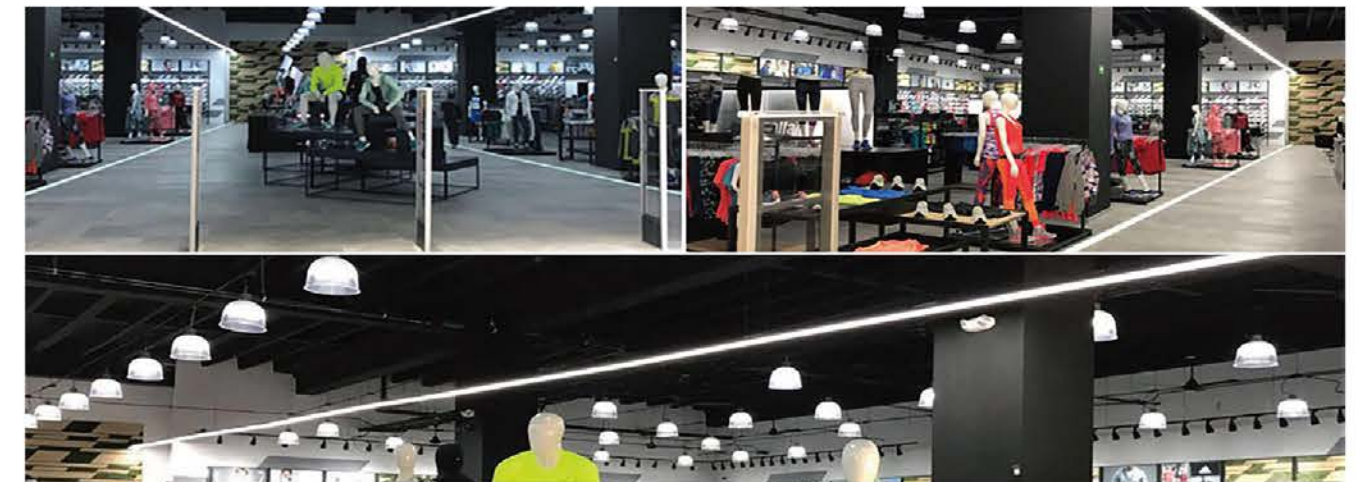

Suspended/Ceiling mounted Connecting

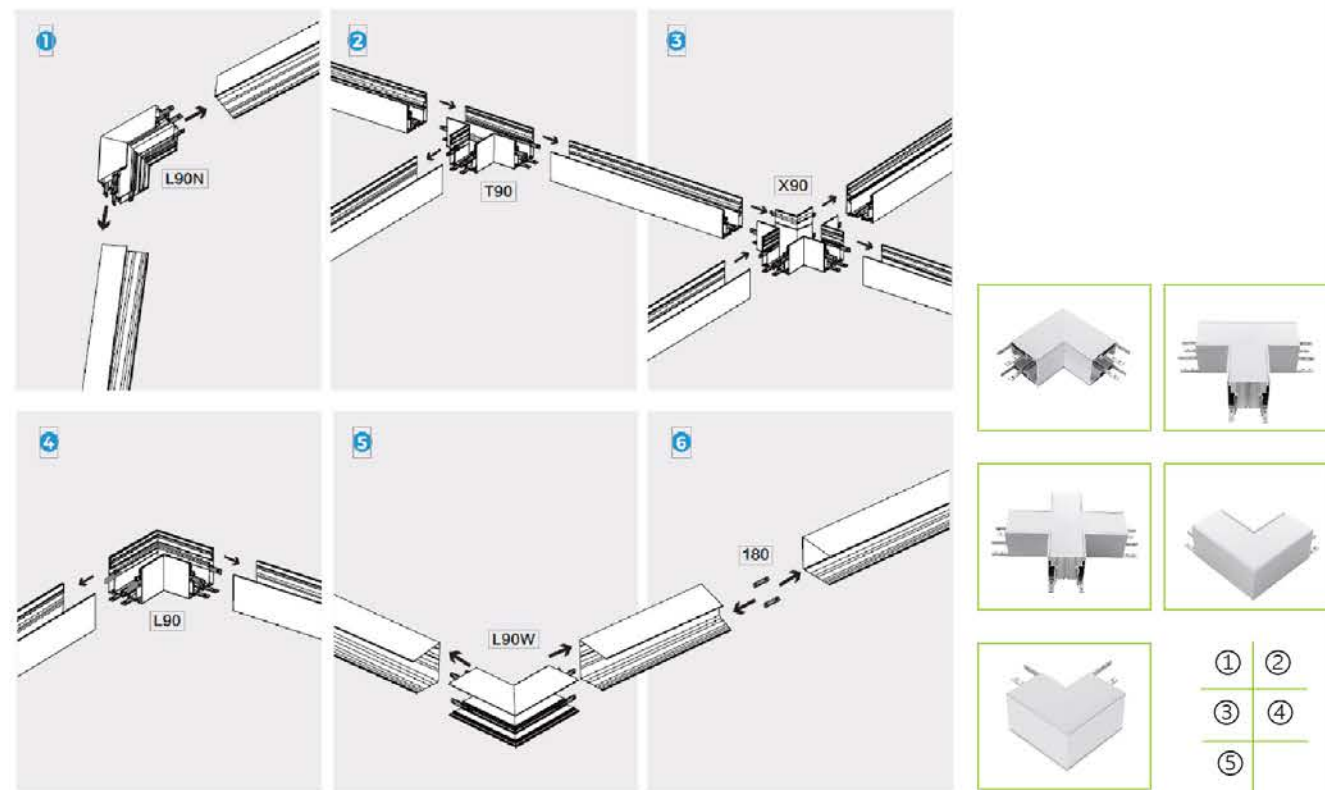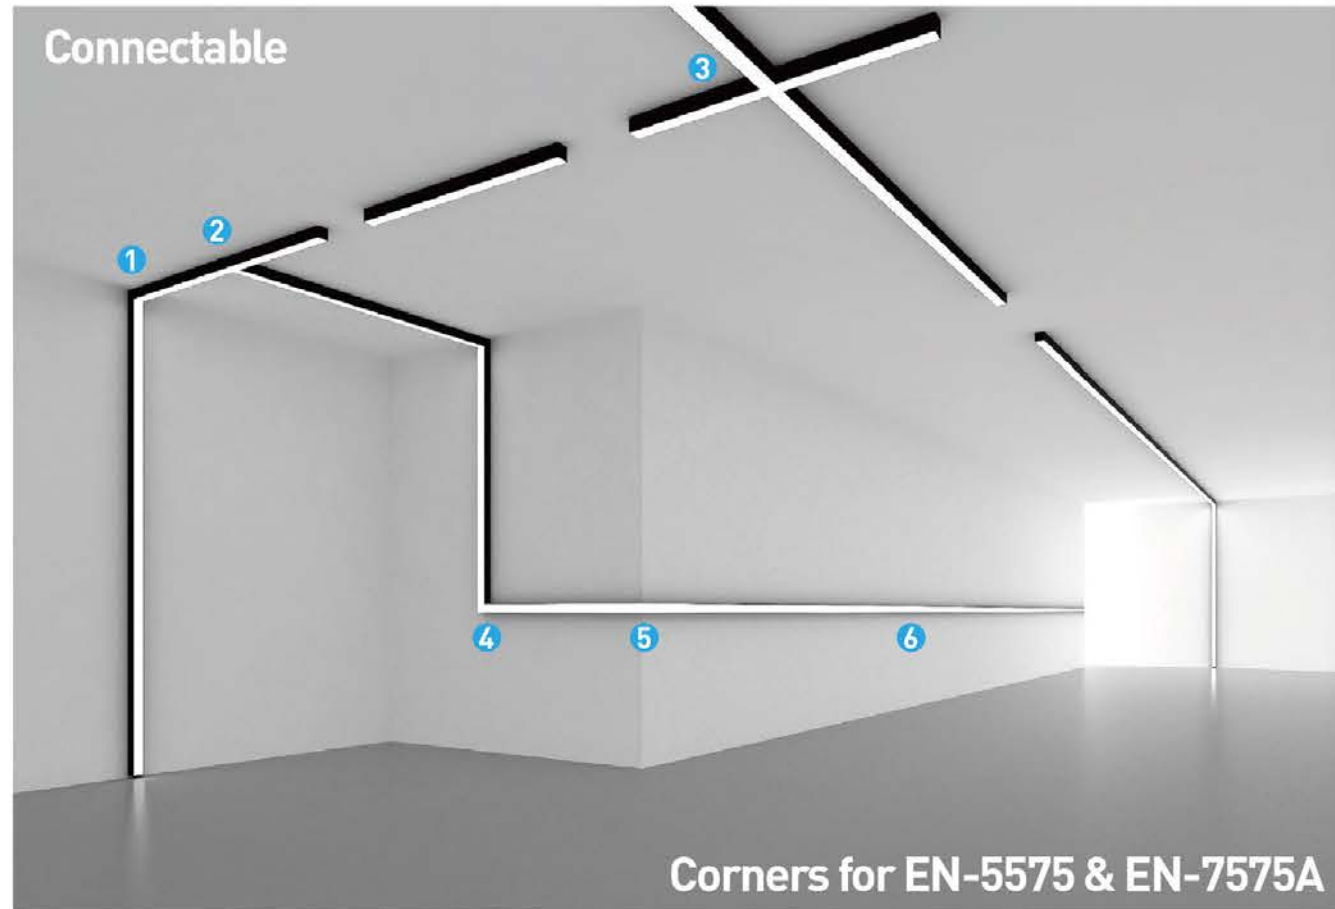

EN-5575 Suspended

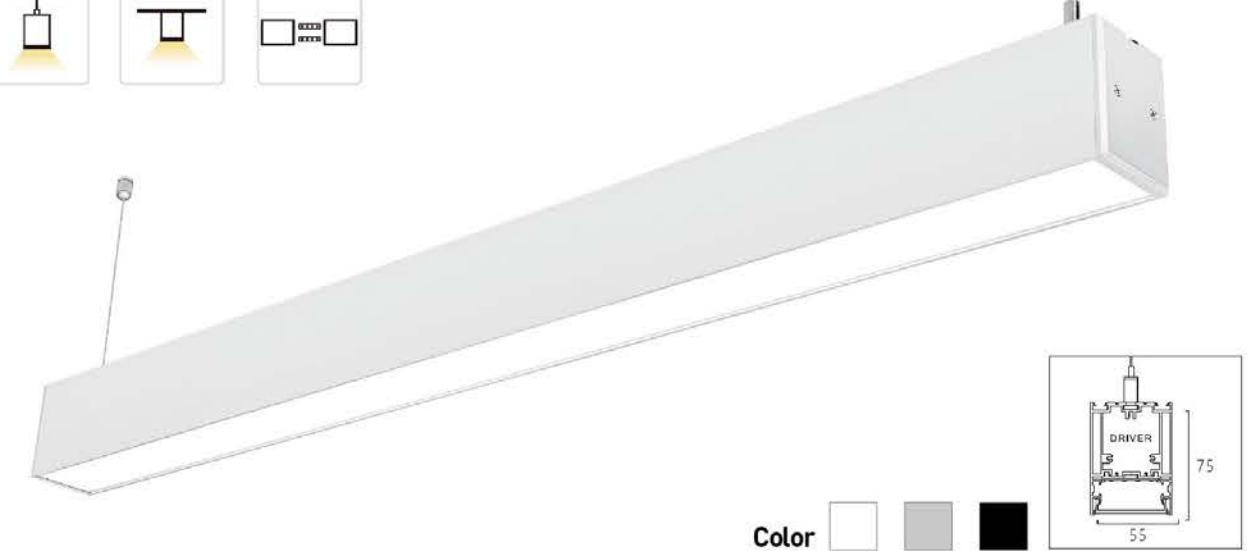

Details & Structure:




Specifications:


Model	Size	Power	Voltage	LED Qty	Luminous Efficiency	Color Temperature	Shell Color
EN-5575-LS20W06	L605*W55*H75mm	20W	AC100-277V AC200-240V	SMD2835 - 126pcs	90lm/W	3000K 4000K 6000K	White Silver Black
EN-5575-LS40W12	L1200*W55*H75mm	40W		SMD2835 - 252pcs			
EN-5575-LS60W18	L1795*W55*H75mm	60W		SMD2835 - 378pcs			
EN-5575-LS80W24	L2388*W55*H75mm	80W		SMD2835 - 504pcs			




■ EN-7575A Suspended

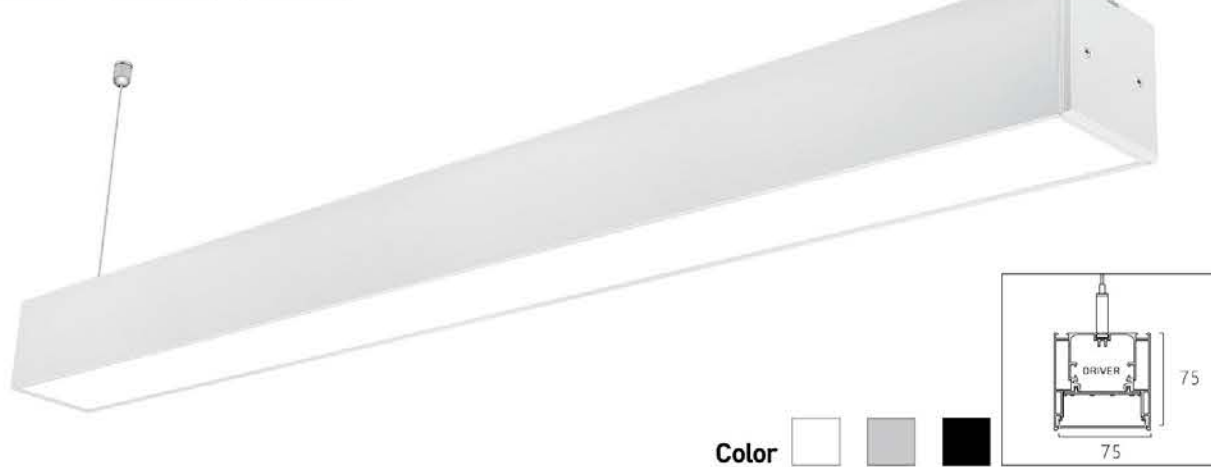

Color   



Details & Structure:

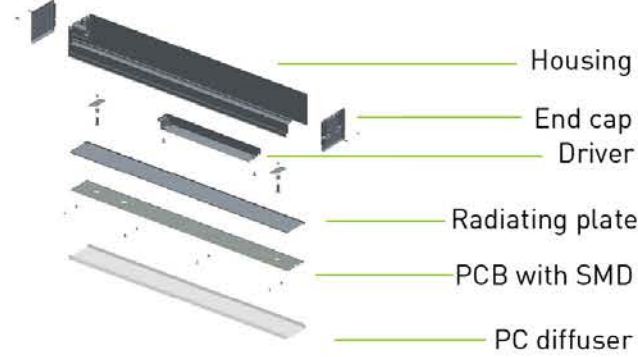

Specifications:

Model	Size	Power	Voltage	LED Qty	Luminous Efficiency	Color Temperature	Shell Color
EN-7575A-LS20W06	L605*W75*H75mm	20W	AC100-277V AC200-240V	SMD2835 - 144pcs	90lm/W	3000K	White Silver Black
EN-7575A-LS40W12	L1200*W75*H75mm	40W		SMD2835 - 288pcs		4000K	
EN-7575A-LS60W18	L1795*W75*H75mm	60W		SMD2835 - 432pcs		6000K	
EN-7575A-LS80W24	L2390*W75*H75mm	80W		SMD2835 - 576pcs			





■ EN-7575B & EN-7575C Suspended




EN-7575B

Color   


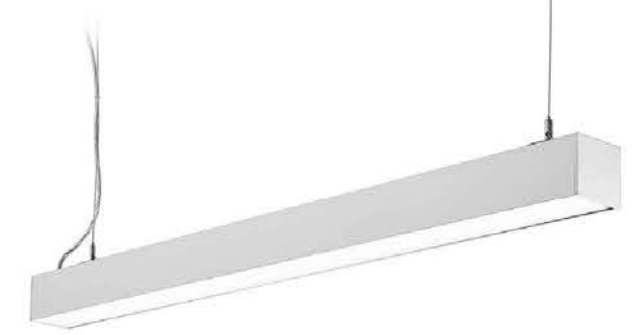



EN-7575C

Color   



Details & Structure:

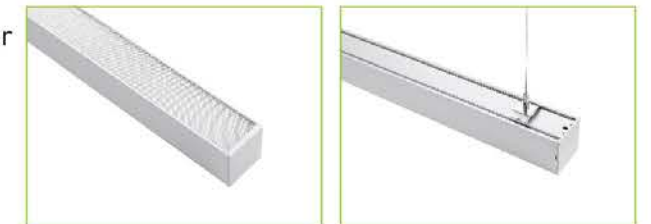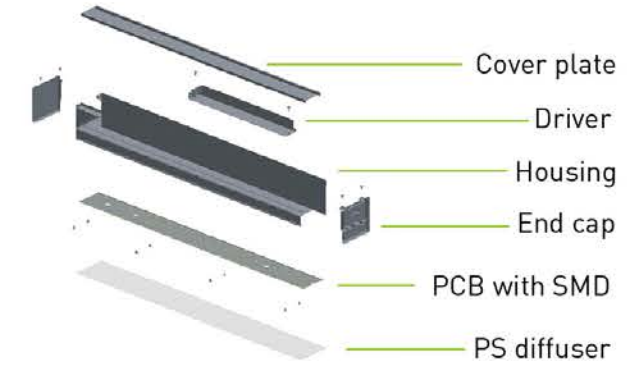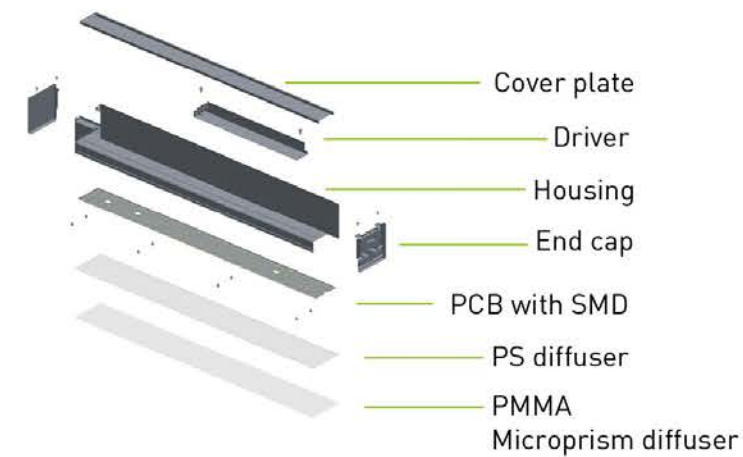

Specifications:


Model	Size	Power	Voltage	LED Qty	Luminous Efficiency	Color Temperature	Shell Color
EN-7575B-LS20W06	L605*W75*H75mm	20W	AC100-277V AC200-240V	SMD2835 - 144pcs	90lm/W	3000K	White Silver Black
EN-7575B-LS40W12	L1200*W75*H75mm	40W		SMD2835 - 288pcs		4000K	
EN-7575B-LS60W18	L1795*W75*H75mm	60W		SMD2835 - 432pcs		6000K	
EN-7575B-LS80W24	L2390*W75*H75mm	80W		SMD2835 - 576pcs			

Model	Size	Power	Voltage	LED Qty	Luminous Efficiency	Color Temperature	Shell Color
EN-7575C-LS20W06	L605*W75*H75mm	20W	AC100-277V AC200-240V	SMD2835 - 144pcs	100lm/W	3000K	White Silver Black
EN-7575C-LS40W12	L1200*W75*H75mm	40W		SMD2835 - 288pcs		4000K	
EN-7575C-LS60W18	L1795*W75*H75mm	60W		SMD2835 - 432pcs		6000K	
EN-7575C-LS80W24	L2390*W75*H75mm	80W		SMD2835 - 576pcs			

■ EN-5065 Suspended



Details & Structure:

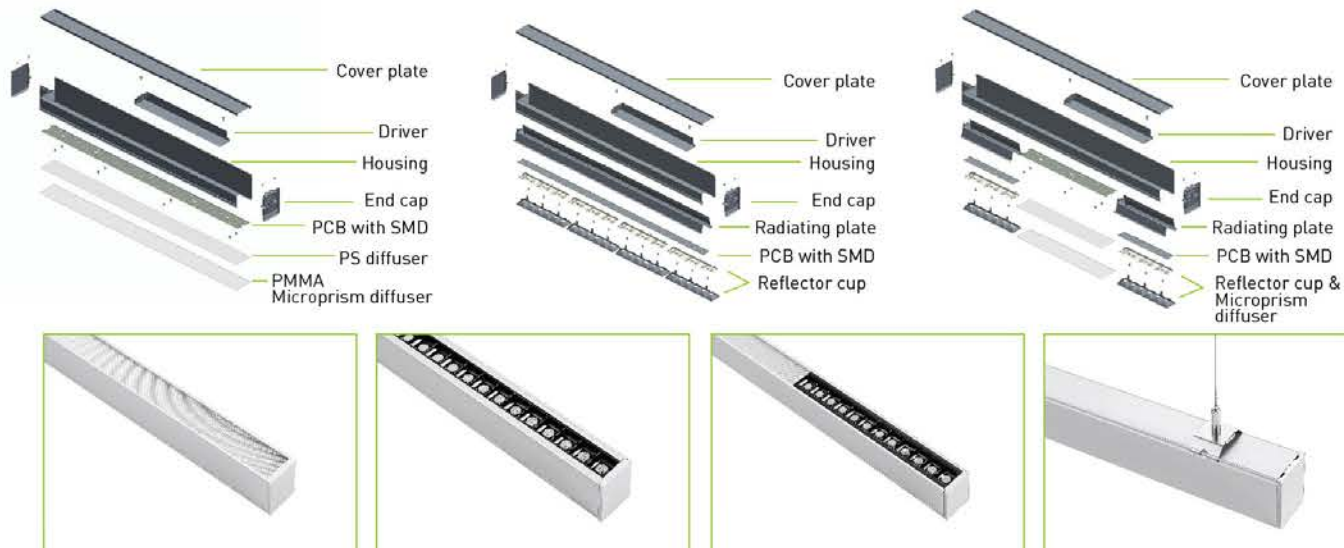

Specifications:

Model	Size	Power	Voltage	Luminous Efficiency	Color Temperature	Shell Color
EN-5065A-LS20W06	L605*W50*H65mm	20W	AC100-277V AC200-240V	85lm/W	3000K	White Silver Black
EN-5065A-LS40W12	L1200*W50*H65mm	40W			4000K	
EN-5065A-LS60W18	L1795*W50*H65mm	60W			6000K	
EN-5065A-LS80W24	L2390*W50*H65mm	80W				

Model	Size	Power	Voltage	Luminous Efficiency	Color Temperature	Shell Color
EN-5065B-LS20W06	L650*W50*H65mm	20W	AC100-277V AC200-240V	100lm/W	3000K	White Silver Black
EN-5065B-LS40W12	L1288*W50*H65mm	40W			4000K	
EN-5065B-LS60W18	L1924*W50*H65mm	60W			6000K	
EN-5065B-LS80W24	L2560*W50*H65mm	80W				

Model	Size	Power	Voltage	Luminous Efficiency	Color Temperature	Shell Color
EN-5065C-LS20W06	L628*W50*H65mm	20W	AC100-277V AC200-240V	90lm/W	3000K	White Silver Black
EN-5065C-LS40W12	L1247*W50*H65mm	40W			4000K	
EN-5065C-LS60W18	L1883*W50*H65mm	60W			6000K	
EN-5065C-LS80W24	L2478*W50*H65mm	80W				

■ EN-2285 up and down lighting



Details & Structure:



Specifications:


Model	Size	Up	Down	Voltage	Luminous Efficiency	Color Temperature	Shell Color
EN-2285A-LS20W06	L600*W22*H85mm	10W	10W	AC100-277V AC200-240V	90lm/W	3000K	White Silver Black
EN-2285A-LS40W12	L1176*W22*H85mm	20W	20W			4000K	
EN-2285A-LS60W18	L1750*W22*H85mm	30W	30W			6000K	
EN-2285A-LS80W24	L2326*W22*H85mm	40W	40W				

Model	Size	Up	Down	Voltage	Luminous Efficiency	Color Temperature	Shell Color
EN-2285B-LS20W06	L600*W22*H85mm	7W	13W	AC100-277V AC200-240V	100lm/W	3000K	White Silver Black
EN-2285B-LS40W12	L1176*W22*H85mm	13W	27W			4000K	
EN-2285B-LS60W18	L1750*W22*H85mm	20W	40W			6000K	
EN-2285B-LS80W24	L2326*W22*H85mm	27W	53W				

■ EN-3570 up and down lighting



Details & Structure:

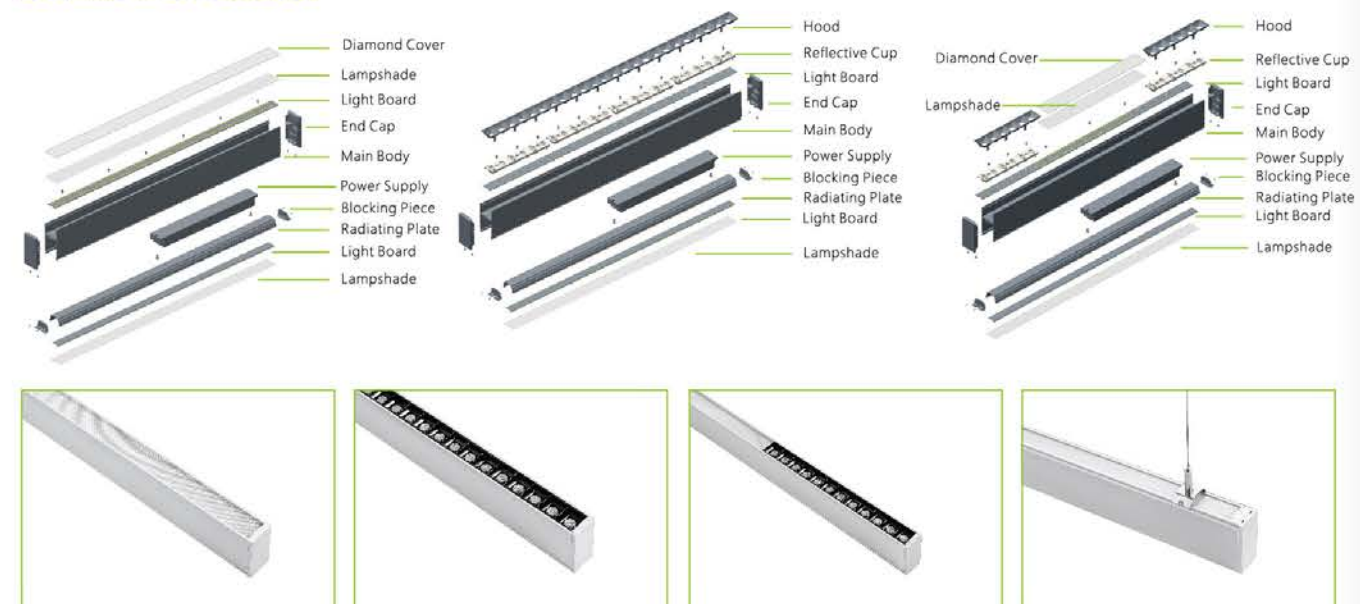


Specifications:

Model	Size	Up	Down	Voltage	Luminous Efficiency	Color Temperature	Shell Color
EN-3570A-LS20W06	L605*W35*H70mm	8.5W	11.5W	AC100-277V AC200-240V	85lm/W	3000K	White
EN-3570A-LS40W12	L1200*W35*H70mm	17W	23W			4000K	Silver
EN-3570A-LS60W18	L1795*W35*H70mm	25.5W	34.5W			6000K	Black
EN-3570A-LS80W24	L2390*W35*H70mm	34W	46W				
Model	Size	Up	Down	Voltage	Luminous Efficiency	Color Temperature	Shell Color
EN-3570B-LS20W06	L650*W35*H70mm	11W	9W	AC100-277V AC200-240V	100lm/W	3000K	White
EN-3570B-LS40W12	L1288*W35*H70mm	22W	18W			4000K	Silver
EN-3570B-LS60W18	L1924*W35*H70mm	33W	27W			6000K	Black
EN-3570B-LS80W24	L2560*W35*H70mm	44W	36W				
Model	Size	Up	Down	Voltage	Luminous Efficiency	Color Temperature	Shell Color
EN-3570C-LS20W06	L608*W35*H70mm	8.5W	11.5W	AC100-277V AC200-240V	90lm/W	3000K	White
EN-3570C-LS40W12	L1200*W35*H70mm	17W	23W			4000K	Silver
EN-3570C-LS60W18	L1836*W35*H70mm	25.5W	34.5W			6000K	Black
EN-3570C-LS80W24	L2384*W35*H70mm	34W	46W				

■ EN-75105 up and down lighting



Details & Structure:


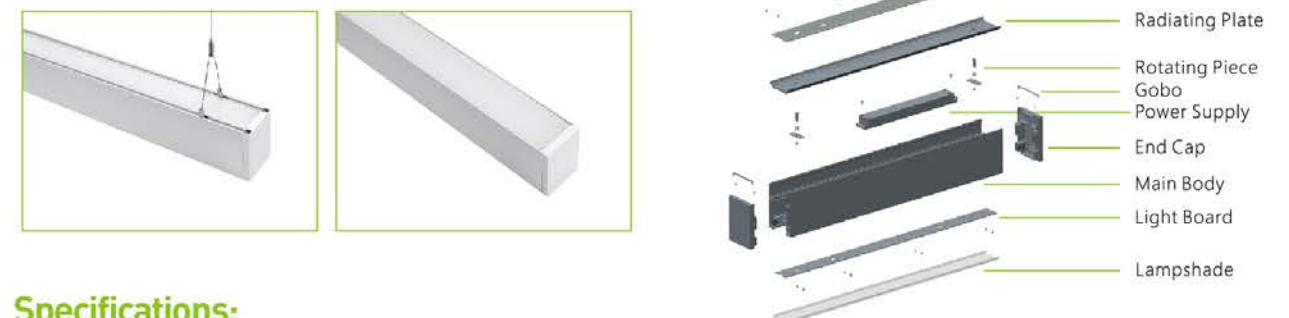


Specifications:

Model	Size	Up	Down	Voltage	Luminous Efficiency	Color Temperature	Shell Color
EN-75105-LH40W06	L619*W75*H105mm	20W	20W	AC100-277V AC200-240V	100lm/W	3000K	White
EN-75105-LH80W12	L1214*W75*H105mm	40W	40W			4000K	Silver
EN-75105-LH90W18	L1808*W75*H105mm	30W	60W			6000K	Black
EN-75105-LH120W24	L2402*W75*H105mm	40W	80W				



■ Recessed connecting

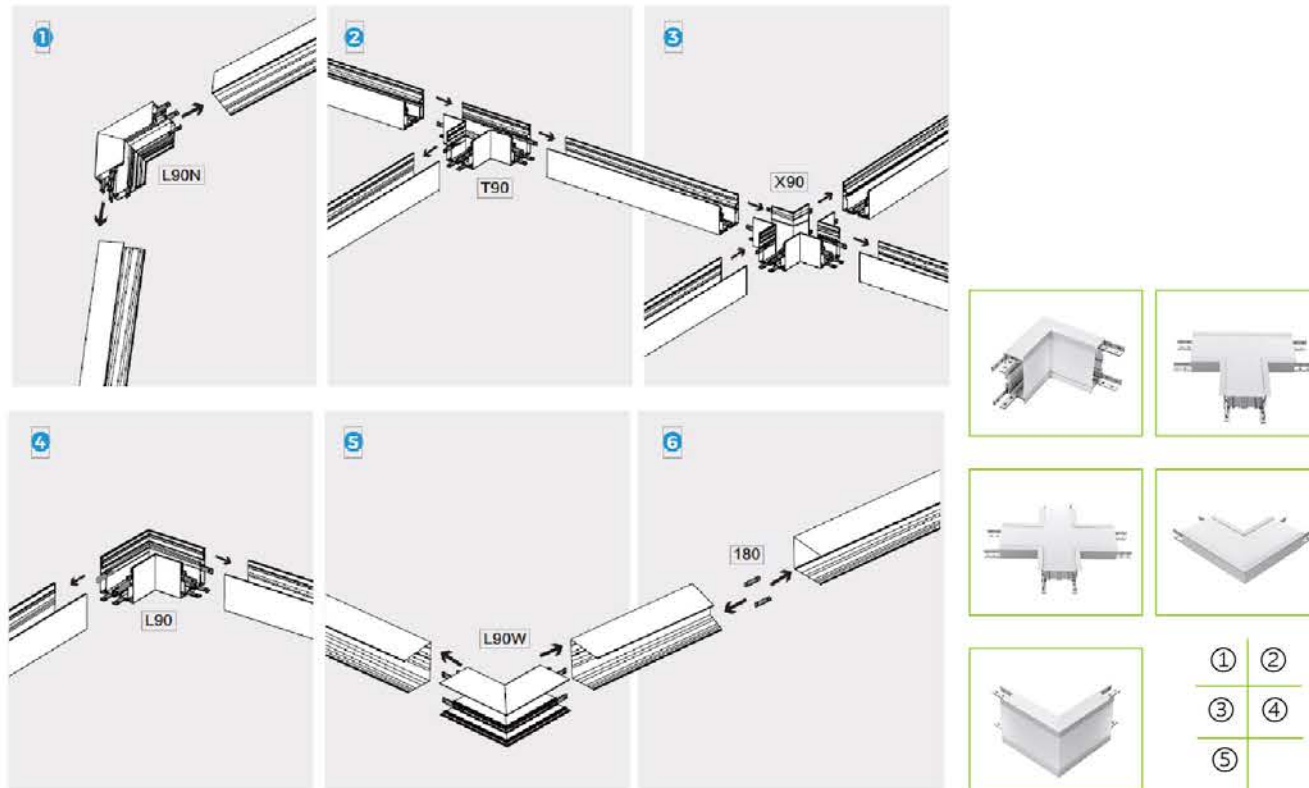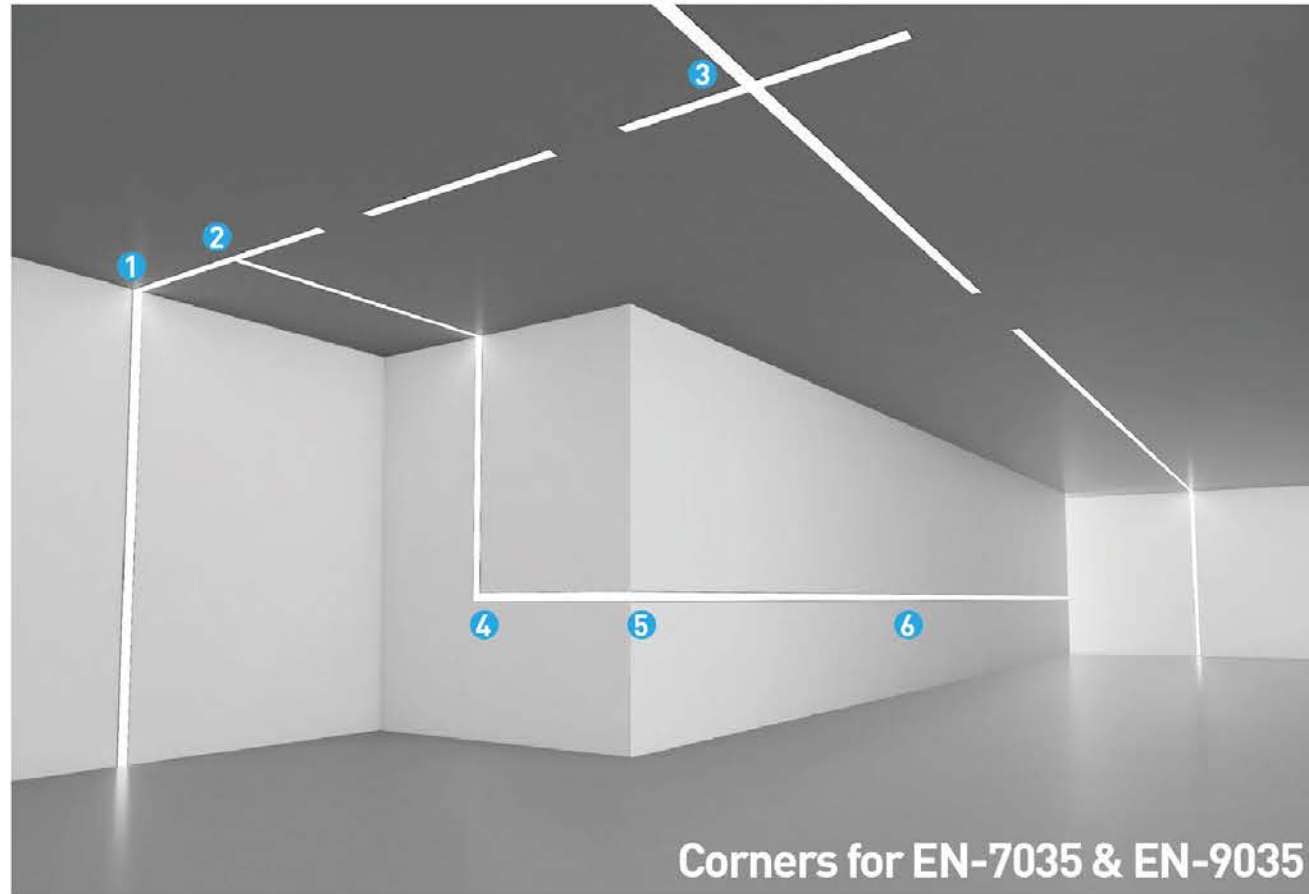

■ EN-7035 Recessed



Details & Structure:



Specifications:


Model	Size	Hole size	Power	Voltage	Luminous Efficiency	Color Temperature	Shell Color
EN-7035-LE20W06	L616*W70*H35mm	L605*W60*H60mm	20W	AC100-277V AC200-240V	90lm/W	3000K	White
EN-7035-LE40W12	L1200*W70*H35mm	L1195*W60*H60mm	40W			4000K	Silver
EN-7035-LE60W18	L1806*W70*H35mm	L1800*W60*H60mm	60W			6000K	Black
EN-7035-LE80W24	L2400*W70*H35mm	L2390*W60*H60mm	80W				



■ EN-9035 Recessed



Color



Details & Structure:




Specifications:

Model	Size	Hole size	Power	Voltage	Luminous Efficiency	Color Temperature	Shell Color
EN-9035-LE20W06	L616*W90*H35mm	L605*W80*H60mm	20W	AC100-277V AC200-240V	90lm/W	3000K	White Silver Black
EN-9035-LE40W12	L1200*W90*H35mm	L1195*W80*H60mm	40W			4000K	
EN-9035-LE60W18	L1806*W90*H35mm	L1800*W80*H60mm	60W			6000K	
EN-9035-LE80W24	L2400*W90*H35mm	L2390*W80*H60mm	80W				




■ EN-8030 Recessed




EN-8030A

Color





EN-8030B

Color



Details & Structure:

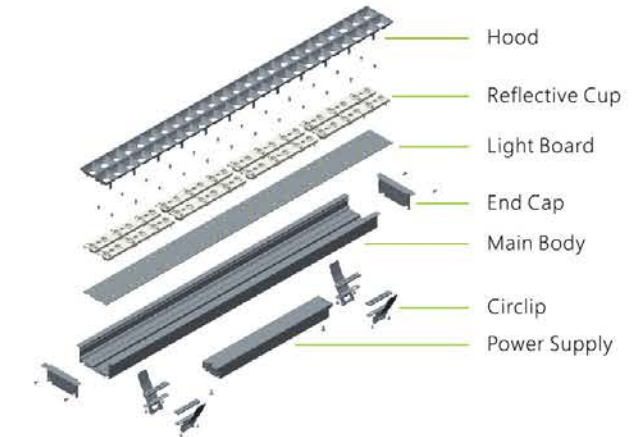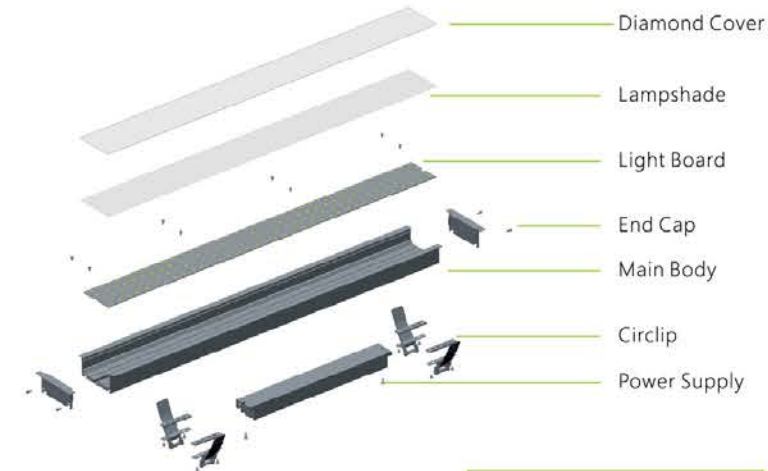


Specifications:

Model	Size	Hole size	Power	Voltage	Luminous Efficiency	Color Temperature	Shell Color
EN-8030A-LE20W06	L616*W80*H30mm	L605*W70*H55mm	20W	AC100-277V AC200-240V	95lm/W	3000K	White Silver Black
EN-8030A-LE40W12	L1200*W80*H30mm	L1195*W70*H55mm	40W			4000K	
EN-8030A-LE60W18	L1806*W80*H30mm	L1800*W70*H55mm	60W			6000K	
EN-8030A-LE80W24	L2400*W80*H30mm	L2390*W70*H55mm	80W				

Model	Size	Hole size	Power	Voltage	Luminous Efficiency	Color Temperature	Shell Color
EN-8030B-LE20W06	L650*W80*H30mm	L645*W70*H55mm	20W	AC100-277V AC200-240V	120lm/W	3000K	White Silver Black
EN-8030B-LE40W12	L1288*W80*H30mm	L1283*W70*H55mm	40W			4000K	
EN-8030B-LE60W18	L1924*W80*H30mm	L1920*W70*H55mm	60W			6000K	
EN-8030B-LE80W24	L2560*W80*H30mm	L2550*W70*H55mm	80W				

SUSPENDED LIGHT SERIES

INSTALLATION INSTRUCTION

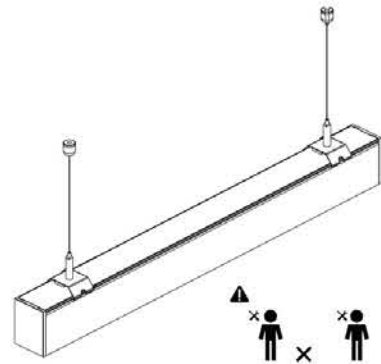


No.	Accessories	Picture	No.	Accessories	Picture
1	Plastic expansion pipe		6	Lock nut	
2	Screw		7	Lock bolt	
3	Cylindrical bolt		8	Metal buckle	
4	Cylindrical nut		9	Connector 2	
5	Seizing wire		10	M6 Screw	

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person


If the external flexible cable of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

Terminal block not included. Installation may require advice from a qualified person.


Installation steps

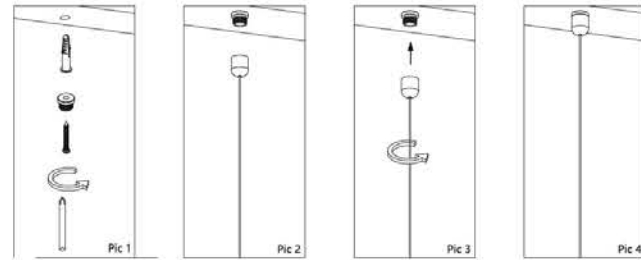

1. Drill plastic expansion pipe into ceiling, put the phillips screw through cylindrical bolt, then into expansion pipe, as diagrammatic direction

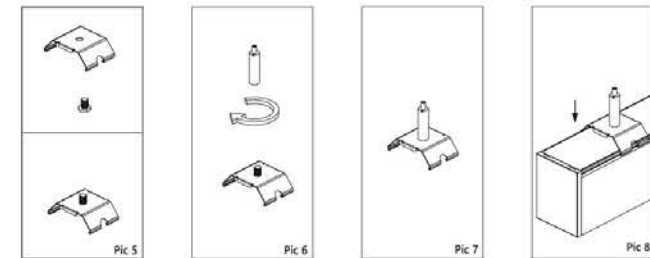


5. Put lock bolt through metal buckle, diagrammatic direction

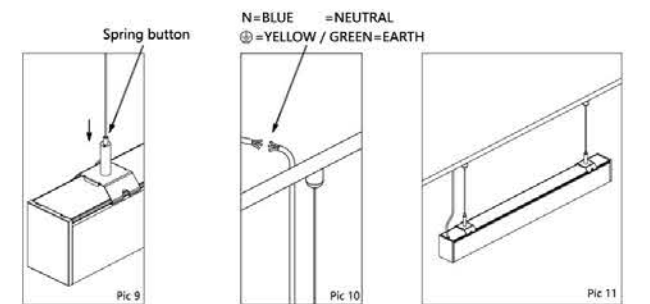


9. Connect the wire and buckle by pressing the spring button on the top of the lock nut, adjust wire length


Connect steps

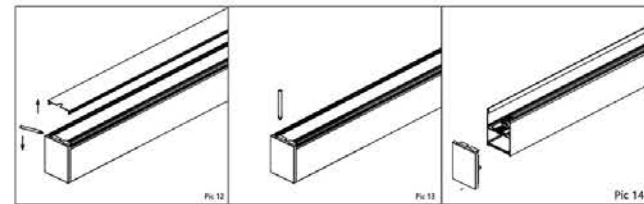

12. Open the cover with a slotted 13. Unscrew the screws on end cap with a Phillips screwdriver 14. Open the end cap

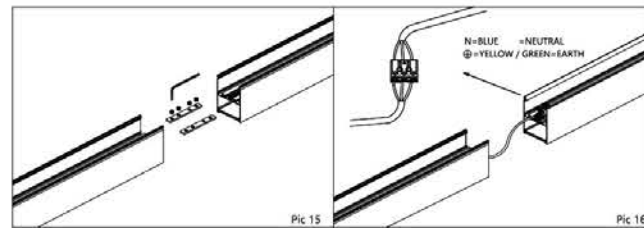


15. Connect lamps by connector, make sure both linear lights linked seamlessly, tighten the screws 16. Connect power cord

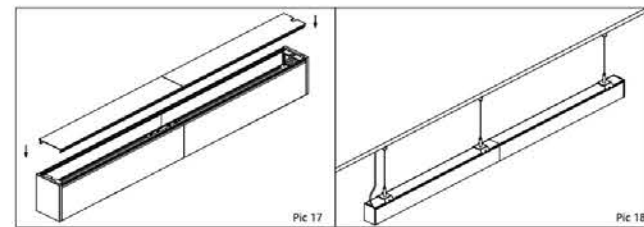


17. Put cover on 18. Seamless connected suspended linear light

RECESSED LIGHT SERIES

INSTALLATION INSTRUCTION

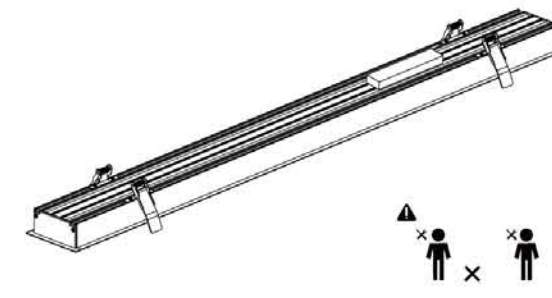

No.	Accessories	Picture
1	Bracket	
2	M4 Screw	
3	Connector 1	
4	Connector 2	
5	M6 Screw	

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person


If the external flexible cable of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

Terminal block not included. Installation may require advice from a qualified person.


Luminaires not suitable for covering with thermally insulating material.

Installation steps


L=BROWN =LIVE
N=BLUE =NEUTRAL
⊕=YELLOW / GREEN=EARTH

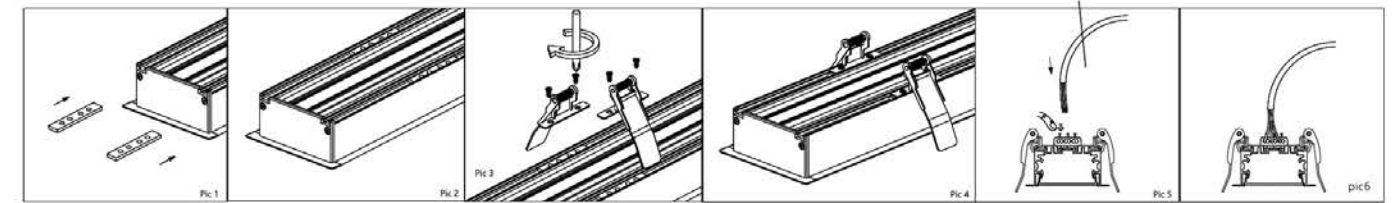

1. Put Connect 1 into lamp slot 2. Adjust placement 3. Put bracket on Connect 1 and fix by M4 screws 4. Fixed bracket 5. Connect power cord as shown in picture 6. Connected power cord

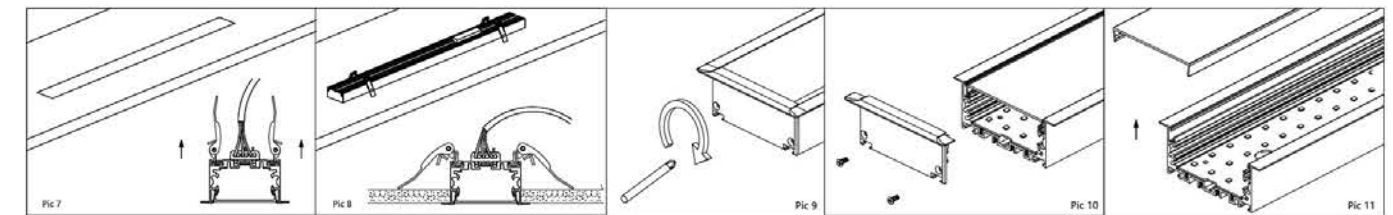


7. Bend the spring part of bracket to 180 degree from the lamp body 8. Insert the lamp into preset position 9. Unscrew the screws on end cap 10. Open end cap 11. Take off PC cover

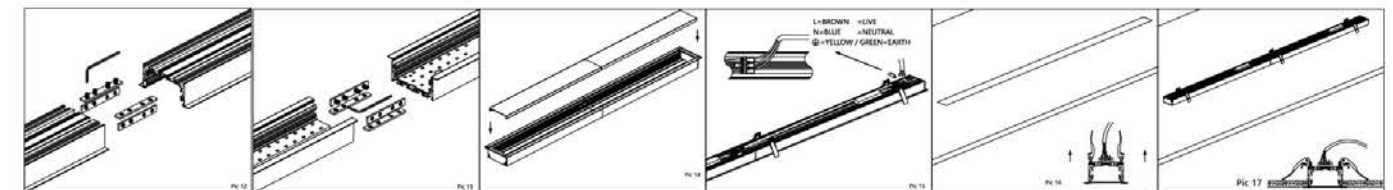


12/13. Put Connector 2 into slot, tighten M6 screws, make sure seamless connected 14/15. Connect power cord as shown in picture 16. Bend the spring part of the bracket to 180 degree from the lamp body 17. Insert the lamp into preset position

WALL MOUNTED LIGHT SERIES


INSTALLATION INSTRUCTION

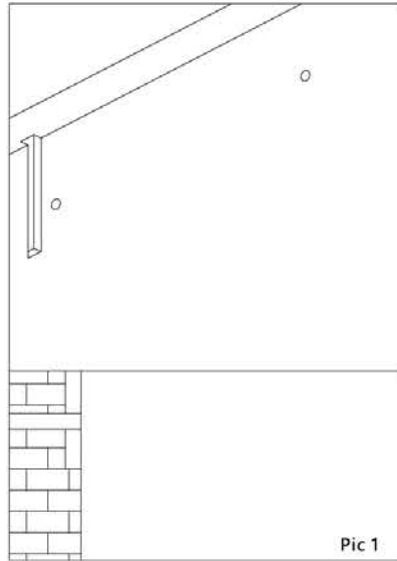


1. Drill two locating holes and dig a wire slot in the wall

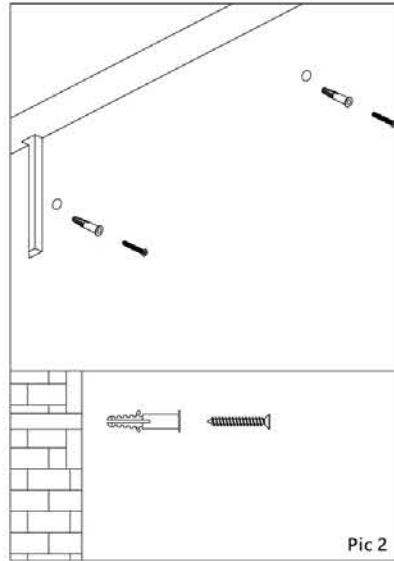


2. Insert the plastic expansion tubes into the locating holes

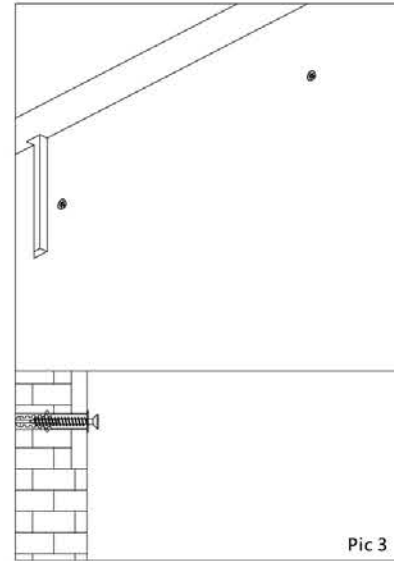


3. Screw the screws into the tube, with the screw head set aside 2mm

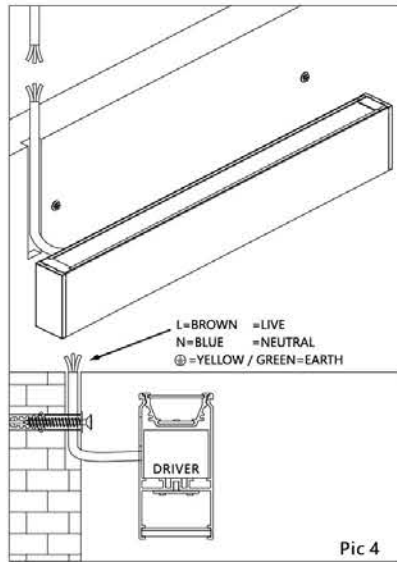

4. Wiring

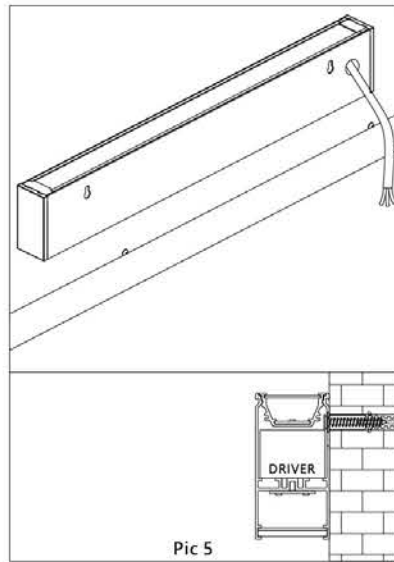

5. Hang and install the lamp body

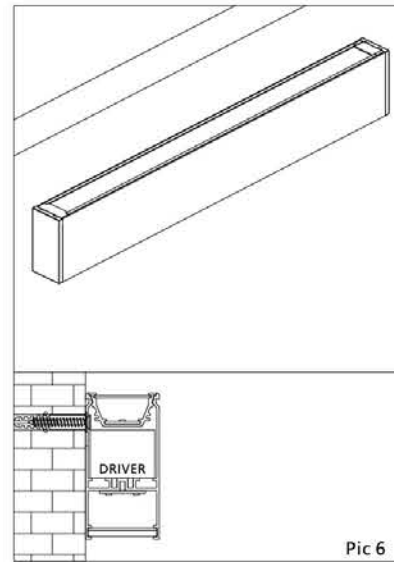

6. Done


Optional accessories



Modern Circular Ring Shape



LC6060 & LC6080 LED Circular Ring Light

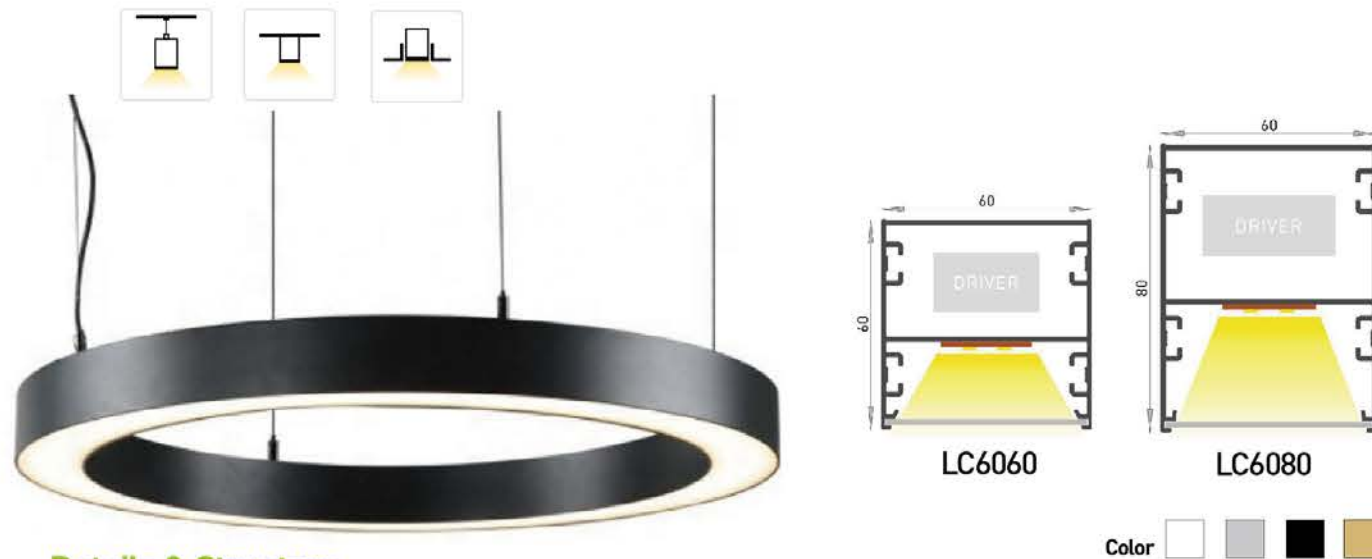


Details & Structure:




Parameters :

Model:	Diameter:		Emitting Color:	Surface Finish:
LC6060	Φ0.45m	Φ1.8m	3000 Kelvin	Matt White(RAL9003)
LC6080	Φ0.60m	Φ2.0m	4000 Kelvin	Matt Black(RAL9005)
.	Φ0.90m	Φ2.4m	6000 Kelvin	Silver
.	Φ1.0m	Φ3.0m	RGB	Golden
.	Φ1.2m	Φ4.0m	CCT (2700K~6000K)	.
.	Φ1.5m	Φ5.0m	RGBW+WW	.
Input voltage:	Way of mounting:	Dimmable:	Beam angle :	Lifespan:
AC200-240V	Suspended	On-Off	120 degree	50,000 hours
AC100-277V	Surface mounted	0-10V/1-10V	.	.
.	Recessed(trimless)	DALI	.	.

LS6060 & LS6080 LED S Shape Light

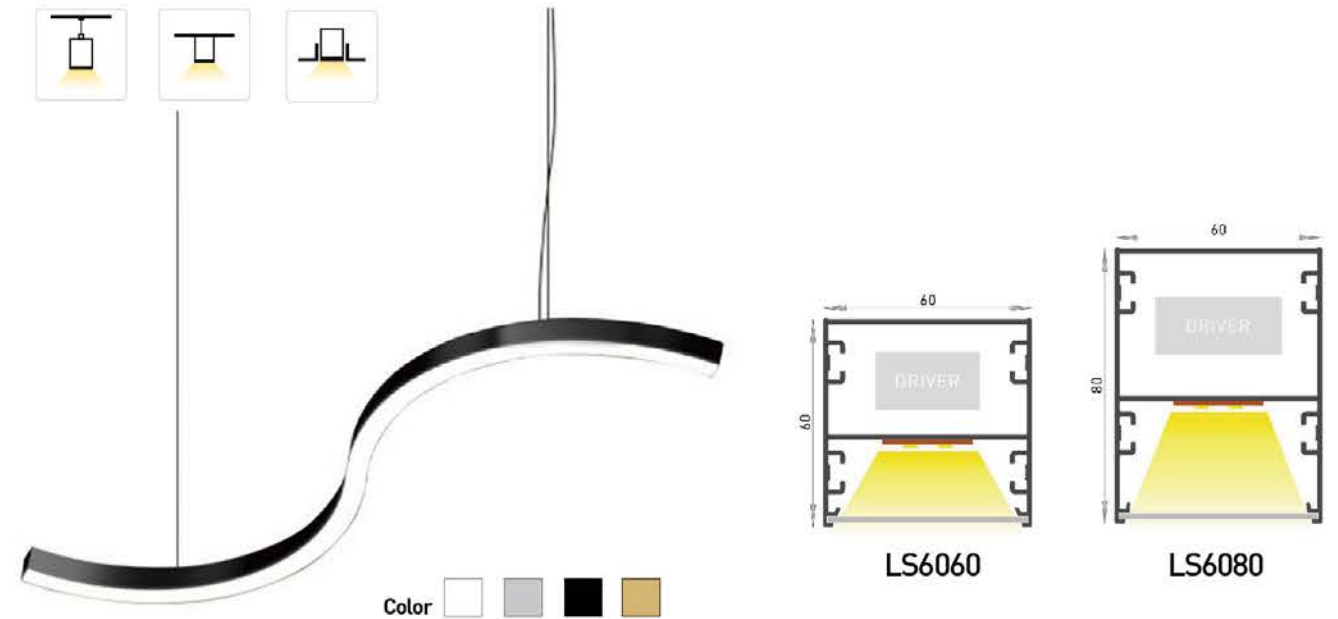

Details & Structure:

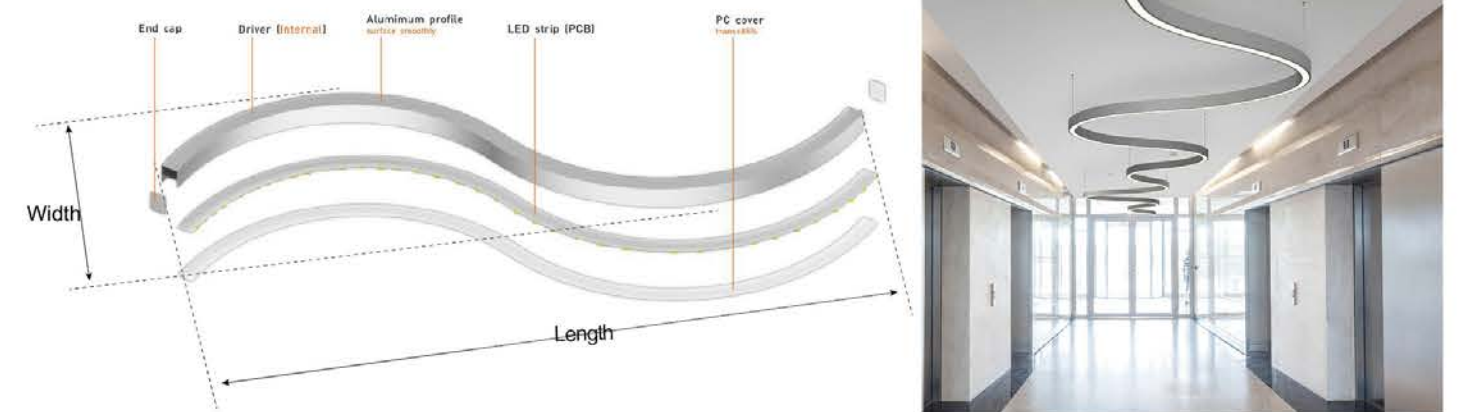

Parameters :

Model:	Size: (L x W)	Emitting Color:	Surface Finish:	
LS6060	890x235mm	3000 Kelvin	Matt White(RAL9003)	
LS6080	1230x306mm	4000 Kelvin	Matt Black(RAL9005)	
.	1455x355mm	6000 Kelvin	Silver	
.	1655x395mm	RGB	Golden	
.	2160x500mm	CCT (2700K~6000K)	.	
.	2590x590mm	RGBW+WW	.	
Input voltage:	Way of mounting:	Dimmable:	Beam angle :	Lifespan:
AC200-240V	Suspended	On-Off	120 degree	50,000 hours
AC100-277V	Surface mounted	0-10V/1-10V	.	.
.	Recessed(trimless)	DALI		


■ LF6060 & LF6080 & LF8080 LED Oval Shape Light



Color ☐ ☐ ☐ ☐




Details & Structure:

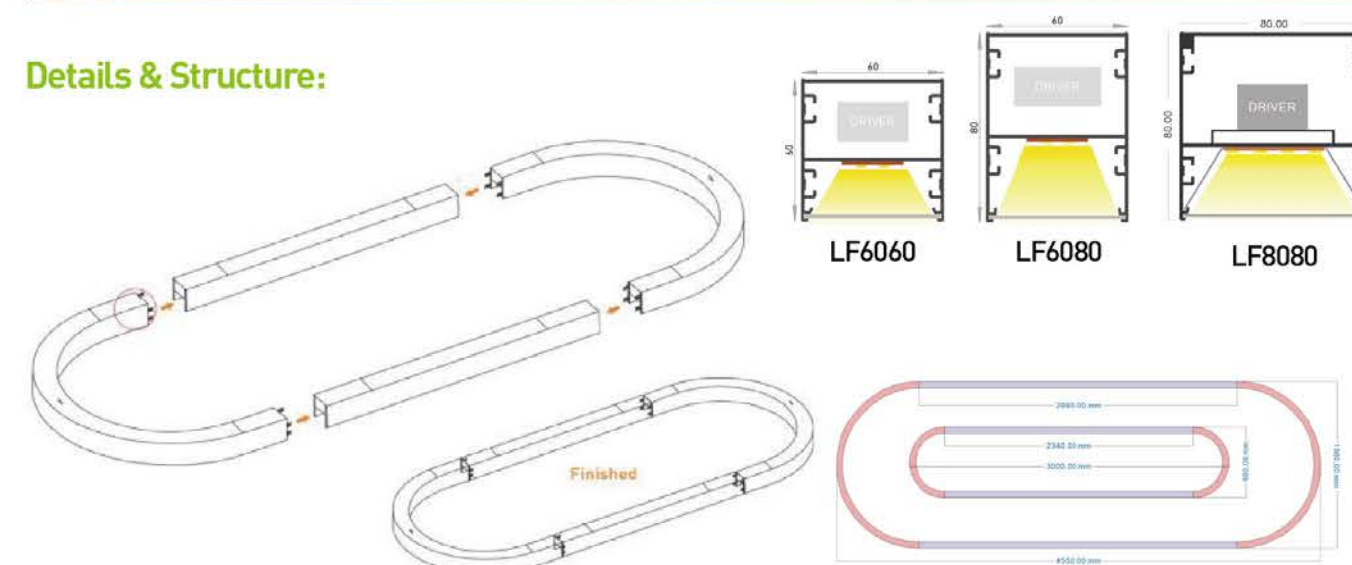

Parameters:

Model:	Size: (L x W)	Emitting Color:	Surface Finish:	
LF6060	2600x600mm	3000 Kelvin	Matt White(RAL9003)	
LF6080	3000x600mm	4000 Kelvin	Matt Black(RAL9005)	
LF8080	4000x600mm	6000 Kelvin	Silver	
.	2600x1200mm	RGB	Golden	
.	3000x1200mm	CCT (2700K~6000K)	.	
.	4000x1200mm	RGBW+WW	.	
Input voltage:	Way of mounting:	Dimmable:	Beam angle :	Lifespan:
AC200-240V	Suspended	On-Off	120 degree	50,000 hours
AC100-277V	Surface mounted	0-10V/1-10V	.	.
.	Recessed(trimless)	DALI	.	.

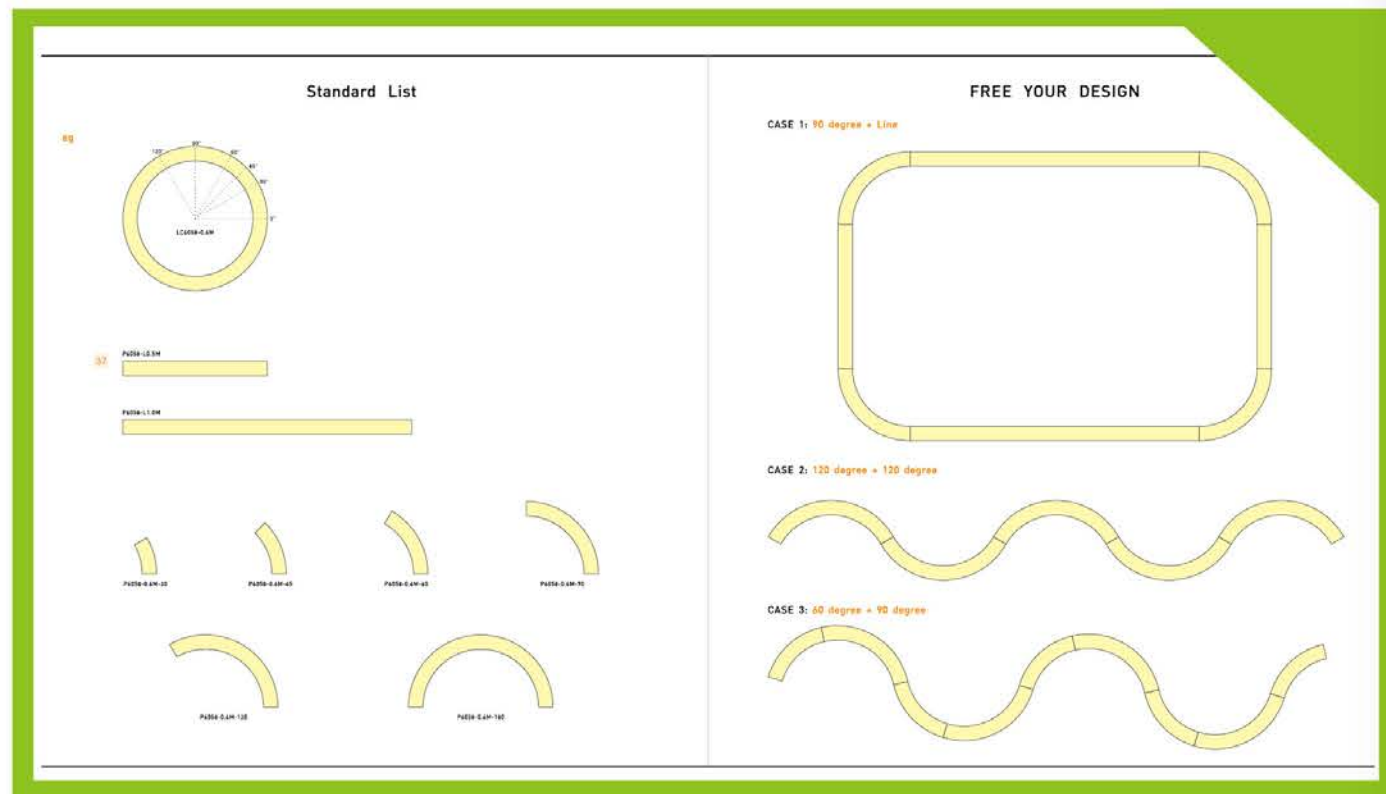

More Customized Designs

